adWall Vario Ring double sided

Resolution: 120 ppi – 1:1 scale

File format: PDF

Color: CMYK - Coated FOGRA39

Flattened file (no layers),
No print marks,
No overprint attribute,
No bleeds,
Do not change the size of the template,
Convert fonts to curves,
Suggested black color parameters for backlighting: C78 M85 Y90 K100



Be sure to remove the red, blue, and yellow lines before saving the files. Leaving the line on will result in it being printed as a design element! In order to properly display the advertisement, all important elements should be inside the protective area marked with Red line. The background and graphics must fill the entire project area. The shape of the cutting die, including the seam and keder area, is markedBlue line. The yellow lines indicate the technical area for sewing tunnels and structural elements – fill it with a solid color.

Download and work on the graphic design template found on the next page of this PDF. If there is more than one, prepare the designs in separate files.

Guideline Label Legend:

Product shape

Safe area (place here elements that should not be trimmed, e.g. logo or text). Remember to remove all lines from the design.

Front

2401 x 2232 [mm]

Print adWall Vario Ring double sided

Back

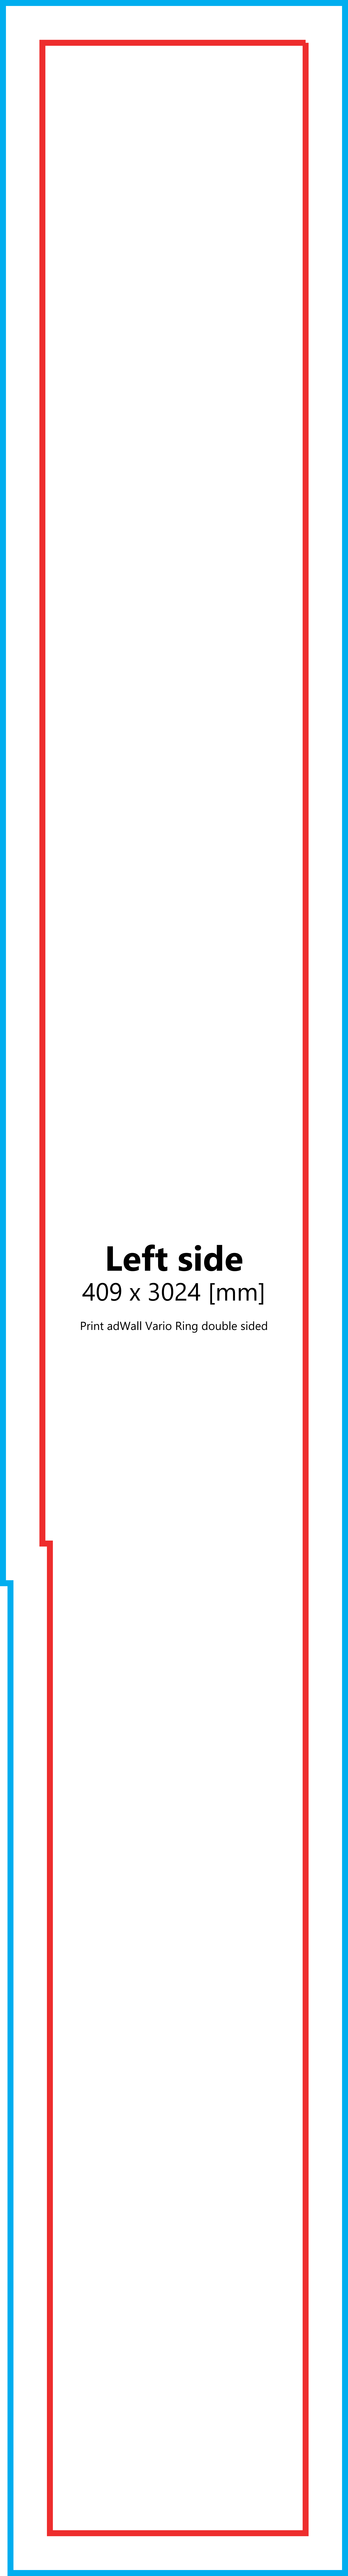
2401 x 2232 [mm]

Print adWall Vario Ring double sided

Right side

409 x 3024 [mm]

Print adWall Vario Ring double sided


Left side
409 x 3024 [mm]
Print adWall Vario Ring double sided

Base

1362 x 411 [mm]

Print adWall Vario Ring double sided